


Directional Coupler, N, 300Watt, 30dB, Single, 350~4000MHz

P.N. : H-M698.3800.3N

Dimension

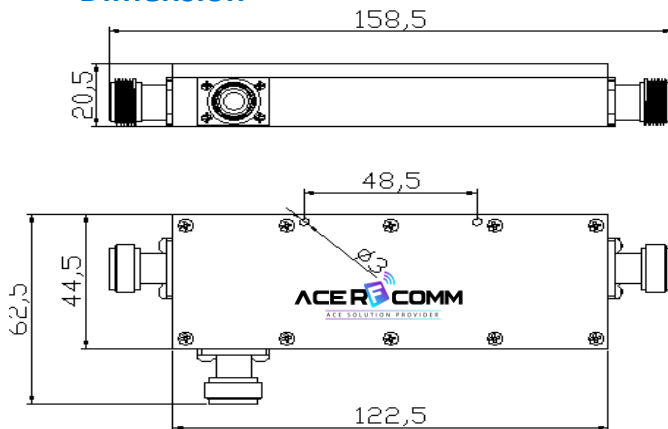

Photo



Electrical & Environmental specification

Frequency Range	350~4000MHz
Impedance	50 Ohm
Input Ave Power	300Watt @ 25°C
Coupling Value	30dB \pm 1.2 dB
Isolation	50dB Min.
V.S.W.R.	1.30 : 1 Max.
Insertion Loss	0.3dB Max
Operating Temperature	-40°C ~ 75 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
RoHS	Complaint

Directional Coupler, N, 300Watt, 30dB, Single, 350~4000MHz

P.N. : H-M698.3800.3N

Test Data

