


Termination, DC~8GHz, SMA Male 5Watt

P.N. : T-0008.SM05.1

Dimension

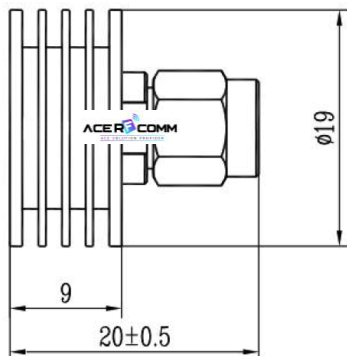

Photo/3D Image



Electrical & Environmental specification

Frequency Range	DC ~ 8GHz
Impedance	50 Ohm
Input Ave Power	5Watt @ 25°C
Peak Power	0.25kW (5 µsec pulse width, 1% duty cycle)
V.S.W.R.	1.25 : 1 Max
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Mating	500 cycles
Housing	Aluminum
Weight	9gram
Dimension	Ø19 * 20mm
RoHS	Complaint


Termination, DC~8GHz, SMA Male 5Watt

P.N. : T-0008.SM05.1

Test Data



Trc1 **S11** SWR 100 mU/ Ref 1.25 U Cal int Smo 1

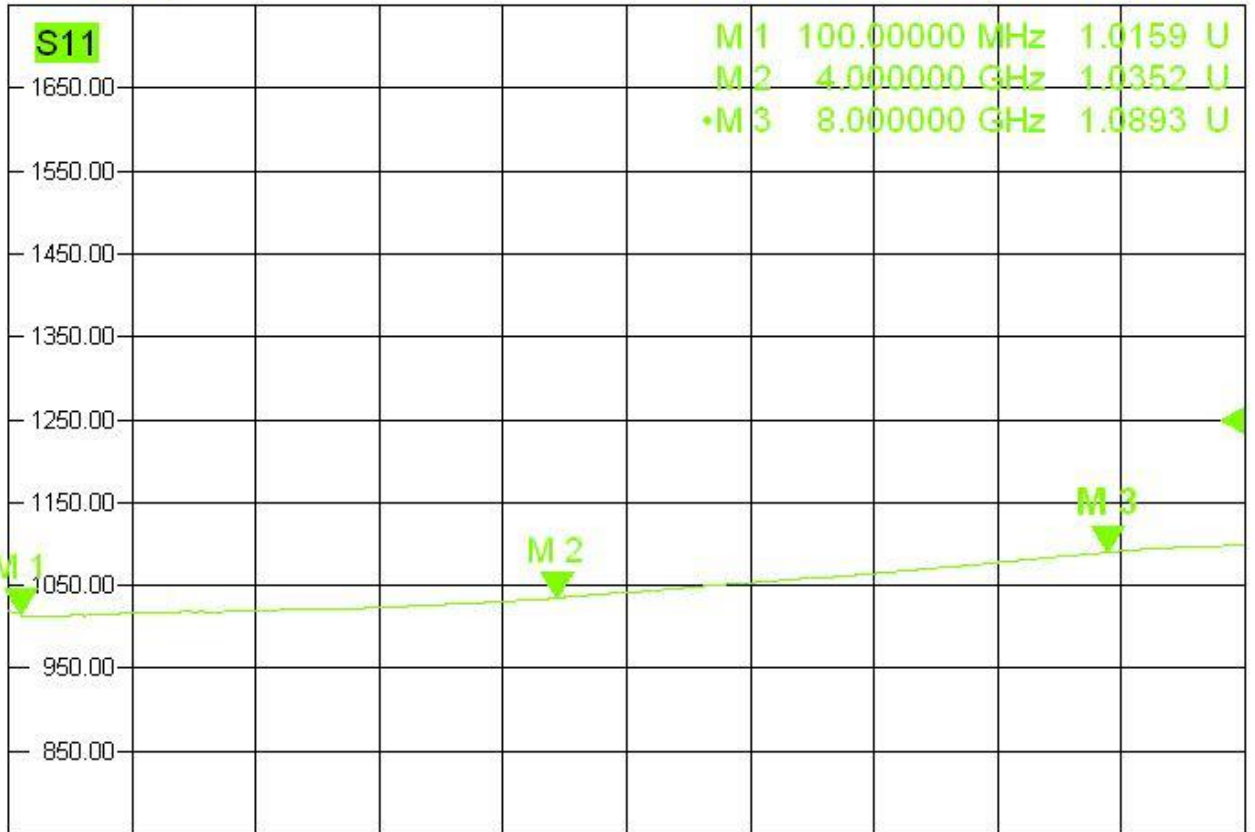

Ch1 Start 10 MHz Pwr 0 dBm Stop 9 GHz

12/2/2021, 9:46 PM