


# Attenuator, DC~4GHz, 4.3/10(M) \* N(F) 100Watt 30dB, Uni-directional

P.N. : A-0430.4NH0.S

## Dimension

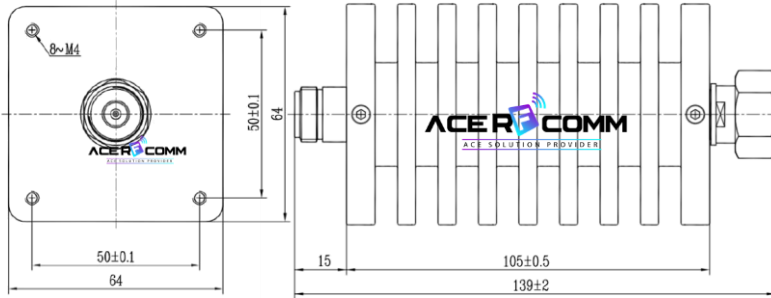

## Photo



## Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	100Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	5kW ( 5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	30dB ± 0.8dB
V.S.W.R.	1.25 : 1 Max
Direction	4.3/10 DIN male input to N female output
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	726 gram
Dimension	64 * 64 * 140mm
RoHS	Complaint

# Attenuator, DC~4GHz, 4.3/10(M) \* N(F) 100Watt 30dB, Uni-directional

P.N. : A-0430.4NH0.S

## Test Data

