



Attenuator, DC~4GHz, N 50Watt 30dB, Uni-directional

P.N. : A-0430.NN50.3

Dimension

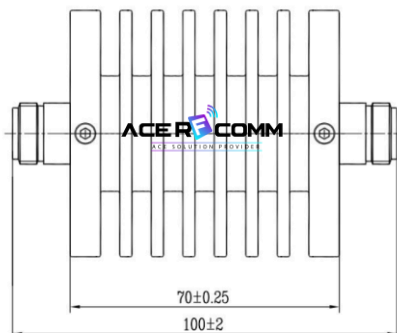

Photo



Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	50Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	2.5kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	30dB ± 0.9dB
V.S.W.R.	1.25 : 1 Max
Direction	N male input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	480 gram
Dimension	64 * 64 * 100mm
RoHS	Complaint

Attenuator, DC~4GHz, N(f,f) 50Watt 30dB, Uni-directional

P.N. : A-0430.NN50.3

Test Data

