


# Attenuator, DC~40GHz, 2.92mm 2Watt 10dB, Bi-directional

P.N. : A-4010.2902.2

## Dimension

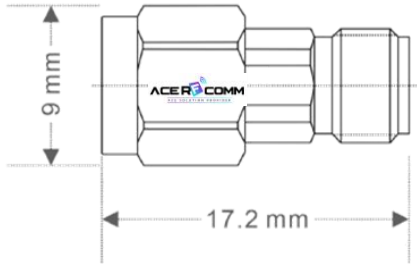

## Photo



## Electrical & Environmental specification

Frequency Range	DC ~ 40GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	200Watt ( 5 μsec pulse width, 1% duty cycle)
Nominal Attenuation	10dB ± 0.8dB
V.S.W.R.	1.30 : 1 Max
Operating Temperature	-55°C ~ 125 °C

## Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	5 gram
Dimension	Ø9 * 17.2mm
RoHS	Complaint

# Attenuator, DC~40GHz, 2.92mm 2Watt 10dB, Bi-directional

P.N. : A-4010.2902.2

## Test Data

