


Attenuator, DC~40GHz, 2.92mm(f,f) 20Watt 40dB, Uni-directional

P.N. : A-4040.2920.2

Dimension

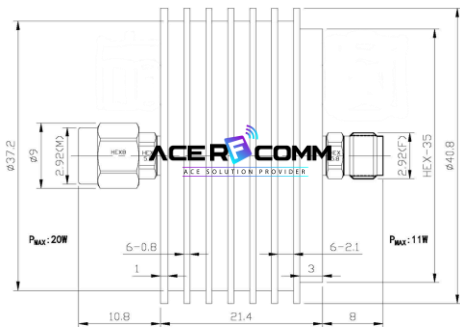

(Dimension is male to female based.)

Photo/3D Image



Electrical & Environmental specification

Frequency Range	DC ~ 40GHz
Impedance	50 Ohm
Input Ave Power	20Watt @ 25°C derated linearly to 2 watts @ 100°C
Peak Power	0.2kW(5 µsec pulse width, 5% duty cycle)
Nominal Attenuation	40dB, ±1.2dB
V.S.W.R.	1.30 : 1 Max
Direction	2.92mm ale input / 2.92mm Female output
Operating Temperature	-55°C ~ 100 °C

Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	72 gram
Dimension	Ø40.8 * 39.8mm
RoHS	Complaint

Attenuator, DC~40GHz, 2.92mm(f,f) 20Watt 40dB, Uni-directional

P.N. : A-4040.2920.2

Test Data

