



Isolator, SMA 60Watt 4.0 ~8.0 GHz

P.N. : I-G004.008S.1

Dimension

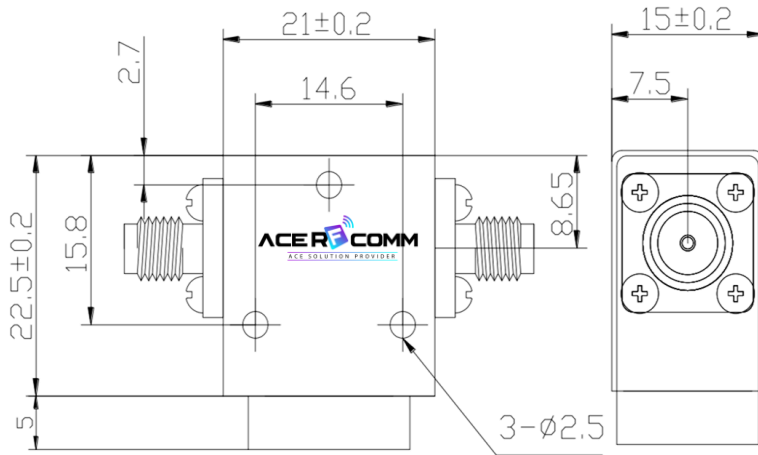

Photo/3D Image

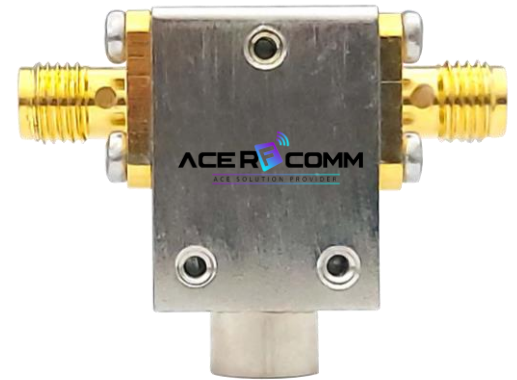

Electrical & Environmental specification

Frequency Range	4.0 ~ 8.0 GHz
Impedance	50 Ohm
Insertion Loss	< 0.7dB
Isolation	> 17dB
Forward Power	60 Watts CW
Reverse Power	20Watts
V.S.W.R.	1.40 : 1 Max
Direction	Clockwise
Working Temperature	0°C ~ +60°C

Material specification

Connector Body	Gold or Tri-alloy plating Brass
Connector Center Contact	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
Dimension	22.5 * 21 * 15 mm
RoHS	Complaint