



## Isolator, 2.92mm 10Watt 27.0 ~31.0 GHz

P.N. : I-G027.031S.1

### Dimension

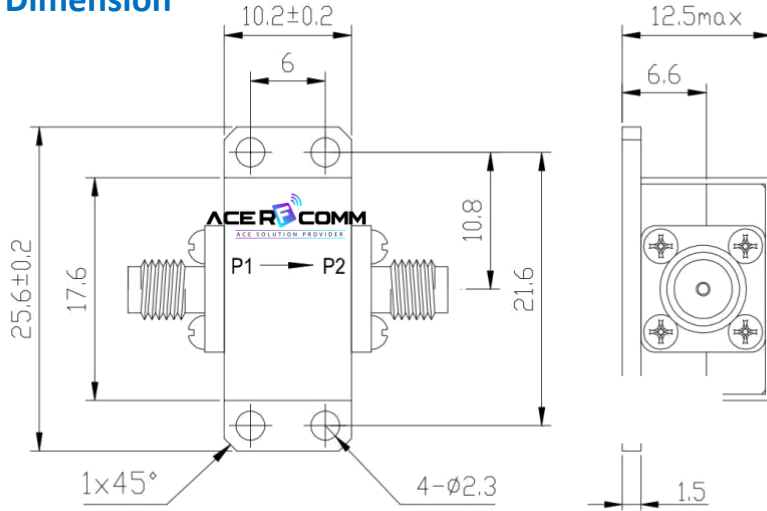

### Photo

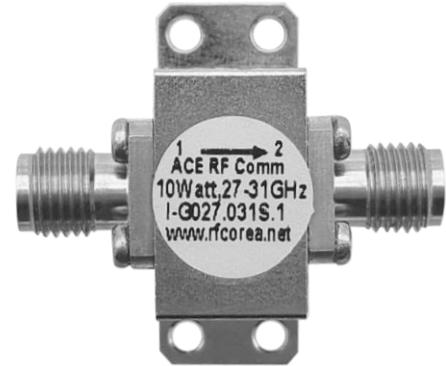

### Electrical & Environmental specification

Frequency Range	27.0 ~ 31.0 GHz
Impedance	50 Ohm
Insertion Loss	< 1.1 dB
Isolation	> 19 dB
Forward Power	10 Watts CW
Reverse Power	1 Watts
V.S.W.R.	1.35 : 1, Max
Direction	Clockwise
Working Temperature	-30°C ~ +70°C

### Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contact	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Aluminum
Dimension	10.2 * 25.6 * 12.5 mm
RoHS	Complaint

# Isolator, 2.92mm 10Watt 27.0 ~31.0 GHz

P.N. : I-G027.031S.1

## Test data

