


Power Divider, 2~50GHz, 2.4mm 2Way 10Watt

P.N. : P-0250.M210.1

Dimension

Photo

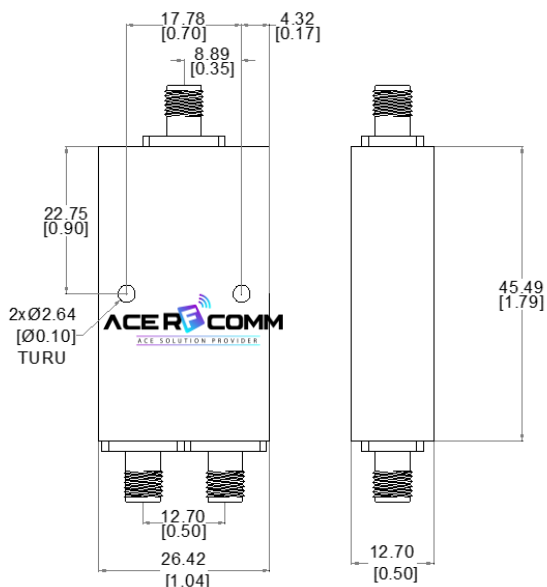

Electrical & Environmental specification

Frequency Range	2 ~ 50GHz
Impedance	50 Ohm
Insertion Loss	2.4dB Max
VSWR	1.75 : 1 Max
Amplitude Balance	± 0.5dB
Phase Balance	6 Degree Max
Isolation	16dB Min
Power	10Watt @ 25°C
Connectors	2.4mm Female connector
Surface Finish	Yellow, Blue or Black painting
Temperature	-30°C ~ 85 °C


Material specification

Connector Body	Passivated Stainless Steel
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel

Power Divider, 2~50GHz, 2.4mm 2Way 10Watt

P.N. : P-0250.M210.1

Test Data

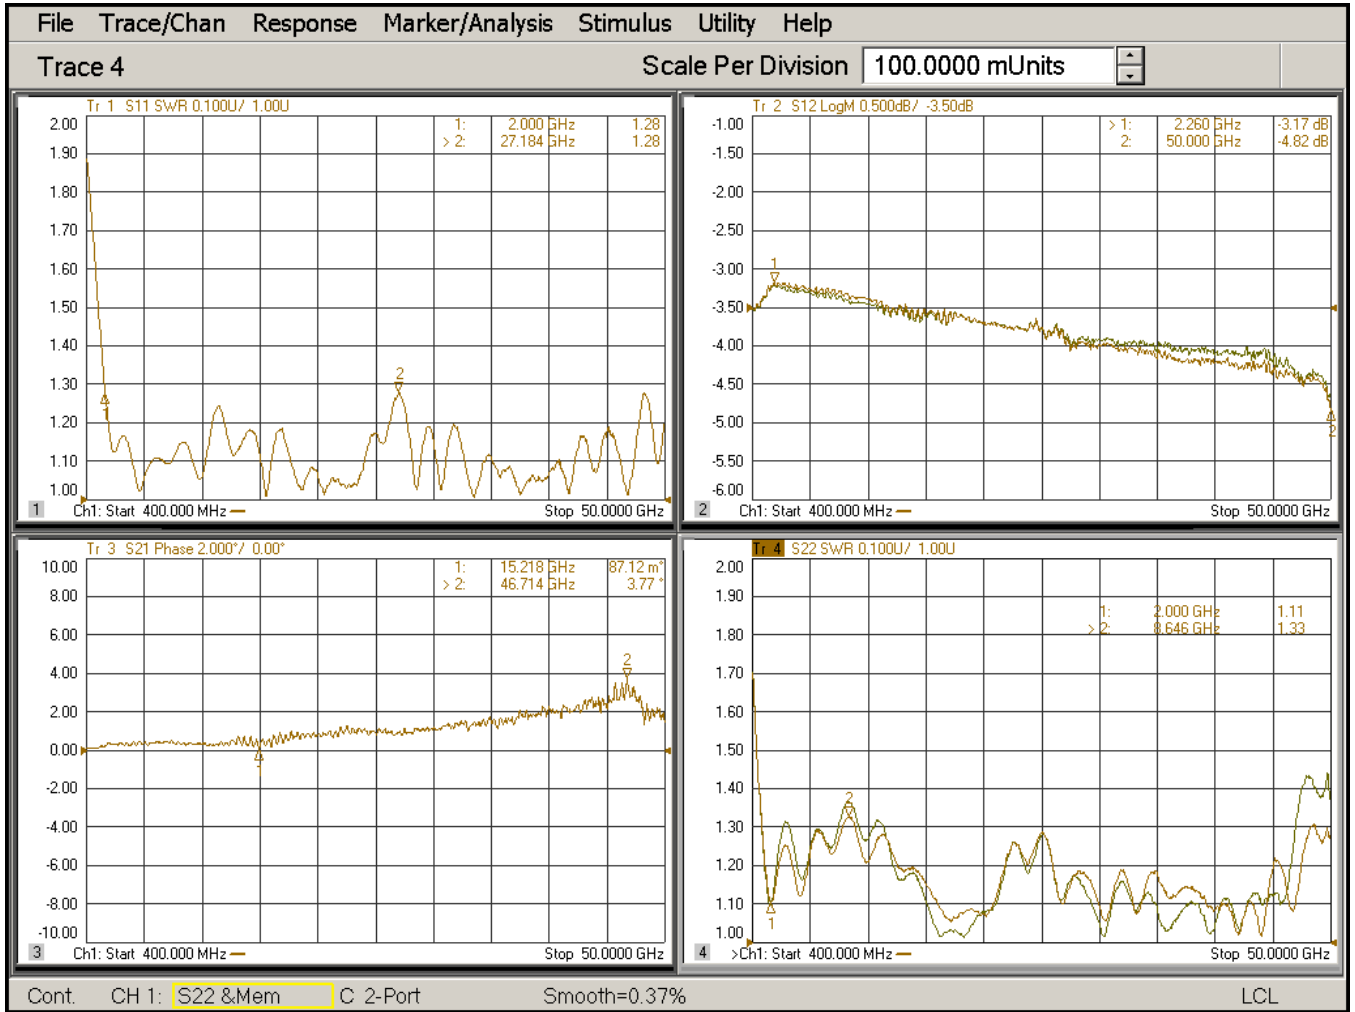

Power Divider, 2~50GHz, 2.4mm 2Way 10Watt

P.N. : P-0250.M210.1

Test Data

