


Power Divider, 10~26.5GHz, SMA 2Way 30Watt

P.N. : P-1026.S230.1

Photo/3D Image



Dimension

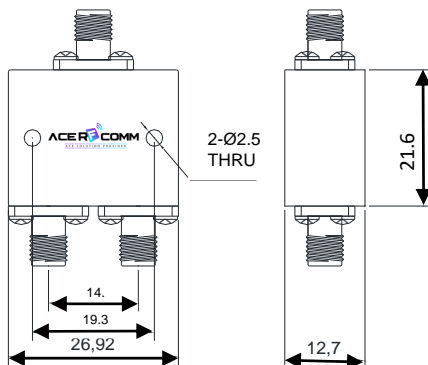

Electrical & Environmental specification

Frequency Range		10 ~ 26.5GHz
Impedance		50 Ohm
Insertion Loss		1.4dB Max
VSWR	Input	1.60 : 1 Max
	Output	1.60 : 1 Max
Amplitude Balance		± 0.4dB
Phase Balance		5 Degree Max
Isolation		17dB Min
Power	as Divider	30Watt @ 25°C
	as Combiner	3Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Blue or Black painting
Temperature		-30°C ~ 60 °C

Material specification

Connector Body	Tri-Alloy or Gold Plating Brass
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel