


# Power Divider, 0.5~26.5GHz, SMA 8Way 20Watt

P.N. : P-M526.S820.1

## Photo/3D Image



## Dimension

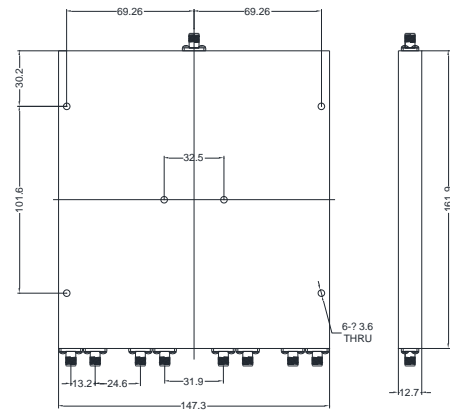

(Connector port locations can be changed, upon requesting spec. )

## Electrical & Environmental specification

Frequency Range		0.5 ~ 26.5GHz
Impedance		50 Ohm
Insertion Loss		8.2dB Max
VSWR	Input	1.70 : 1 Max
	Output	1.70 : 1 Max
Amplitude Balance		± 0.7dB
Phase Balance		10 Degree Max
Isolation		14dB Min
Power		20Watt @ 25°C
Connectors		SMA Female connector
Surface Finish		Blue or Black painting
Temperature		-32°C ~ 85 °C

## Material specification

Connector Body	Gold Plating Brass
Connector Center Contacts (Female)	Gold Plating BeCu
Housing	Aluminum
Other Screw	Stainless Steel