


# Adaptor, SMA Male to SMA Female, Pushon(Quick)

P.N. : X-SMSM.06MF.2

## Dimension

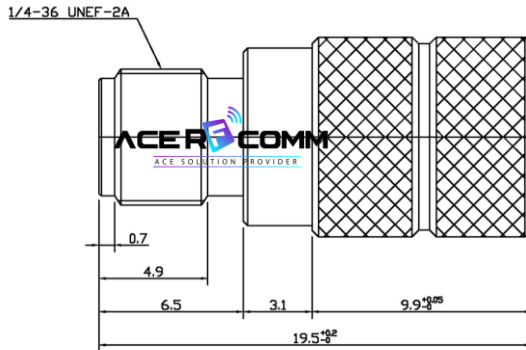

## Photo



## Electrical specification

Frequency Range	DC ~ 6GHz
Impedance	50 Ohm
V.S.W.R.	1.20 : 1 Max.
Insertion Loss	0.95 dB Max.

## Material specification

Connector Body	Gold Plating Brass
Connector Center Contact	Gold Plating Brass / Becu
Insulator	PTFE
Connector Mating	500 cycles

## Environmental specification

Corrosion resistance	MIL-STD-202, Method 101, Condition B
Moisture resistance	MIL-STD-202, Method 106
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Operating Temperature	-65°C ~ 125 °C
RoHS	Compliant