


Attenuator, DC~4GHz, N(f,f) 500Watt 40dB, Uni-directional

P.N. : A-0440.NNLD.S1

Dimension

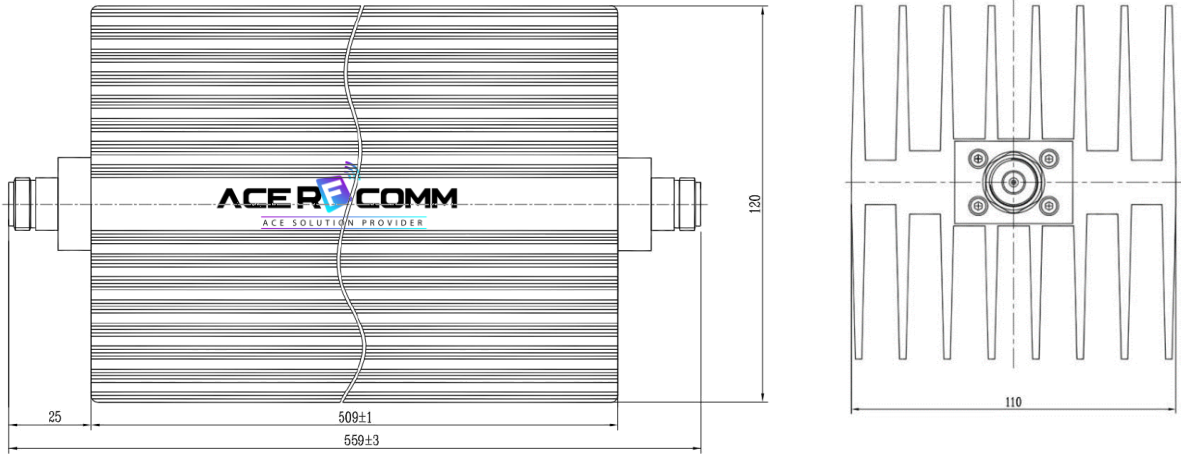

Photo





Electrical & Environmental specification

Frequency Range	DC ~ 4GHz
Impedance	50 Ohm
Input Ave Power	500Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	2.5kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	40dB ±1.2dB
V.S.W.R.	1.30 : 1 Max
Direction	N female input to N female output
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	7.2 Kg
Dimension	110 * 120 * 559mm
RoHS	Complaint

Electrical Test Data

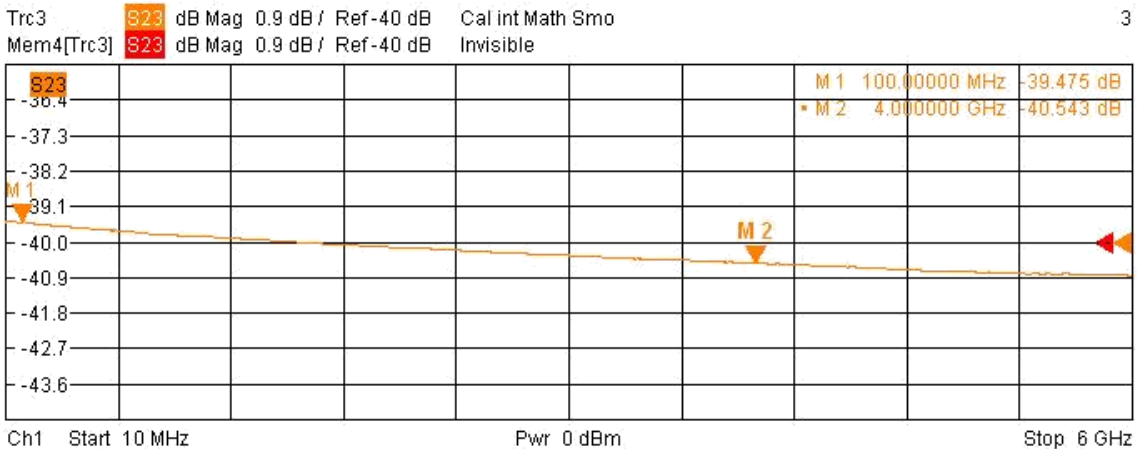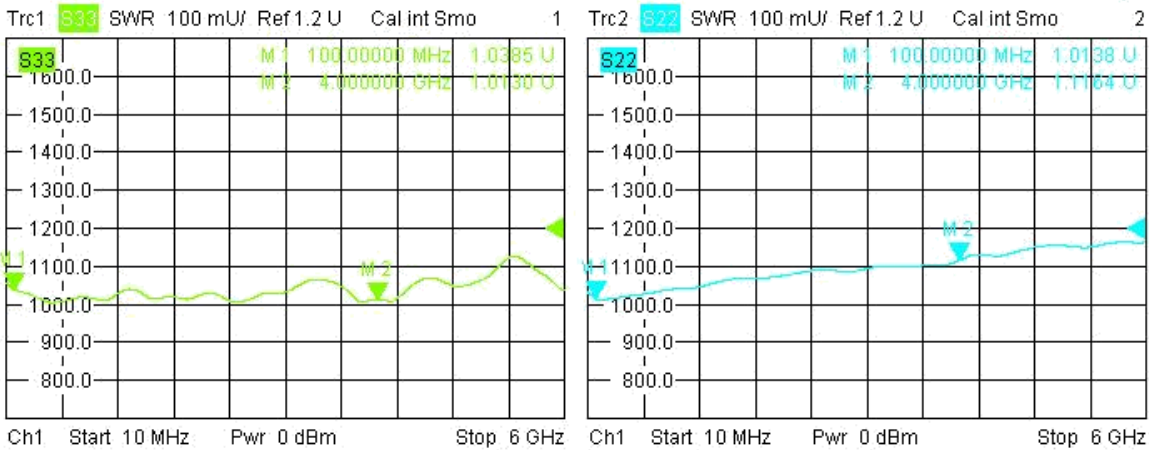

7/7/2022, 8:27 PM